


CBB61/C61-II型交流金属化薄膜电容器.....P0/C

Type CBB61/C61-II Metallized film capacitor A.C.....P0/C

CBB61/C61-II型 交流金属化薄膜电容器

Type CBB61/C61-II Metallized film capacitor A.C

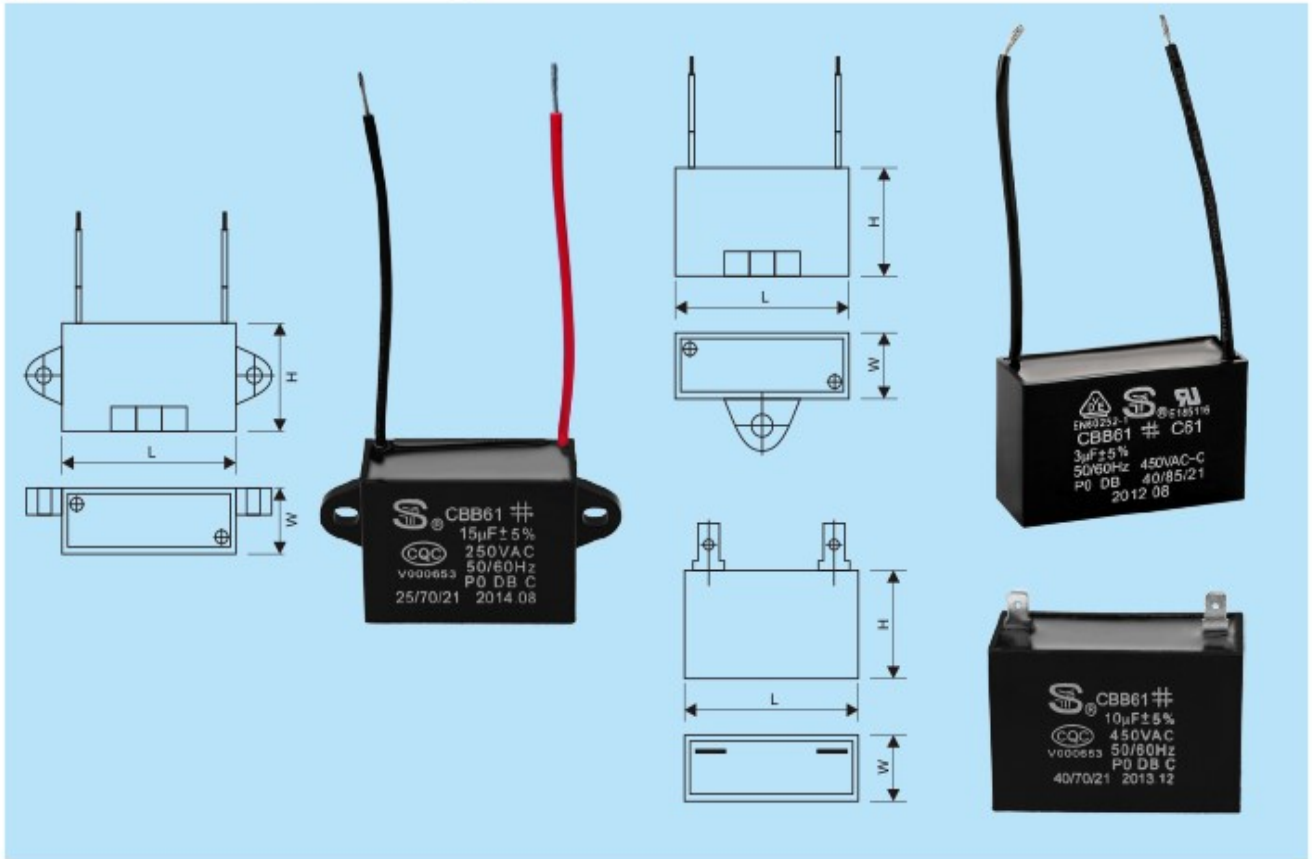

◆ **执行标准**：满足《IEC：60252-1-2011》《UL810-2008》《GB3667.1-2005》标准；

◆ **产品特点**：损耗小，体积小，自愈性能优异，电容量稳定，使用安全可靠等特点。

◆ **产品用途**：广泛用于风机、电风扇、除湿机等电器及设备的电机起动运行。

◆ **主要技术参数**：

额定电压：110V.AC-450V.AC

容量偏差：±3%、±5%、±10%

损耗角正切值： $\text{tg } \delta \leq 0.0025(100\text{Hz})$

极间耐压：2Un/5s

极壳耐压：2000V.AC or 2Un+1000VAC

产品认证：VDE、UL、CUL、CQC

稳态过电压：允许1.1Un下长期运行

稳态过电流：允许1.3In下长期运行

优选气候类别：40/70/21 40/85/21 40/105/21

运行等级：C(3000h)

安全等级：P0

Reference Standard: Meet the requirements of standard 《IEC:60252-1-2011》《UL810-2008》《GB3667.1-2005》

Product Characteristic: Low in dissipation, small size, good self-healing performance, stable capacitance and usage safety and dependable.

Application: They are widely used for draught fan, fan, dehumidifier...etc electrical appliances and equipments start and running.

Technical Specification:

Rated Voltage: 110V.AC-450V.AC

Capacitance Tolerance: ±3%、±5%、±10%

Dissipation factor: $\text{tg } \delta \leq 0.0025(100\text{Hz})$

Voltage Proof (Vt-t): 2Un/5s

Voltage Proof(Vt-c): 2000V.AC or 2Un+1000VAC

Product Certificates: VDE、UL、CUL、CQC

Steady state overvoltage: Permit long term of operation under 1.1Un

Steady state overcurrent: Permit long term of operation under 1.3In

Climate Category: 40/70/21 40/85/21 40/105/21

Class of Operation: C(3000h)

Safety Class: P0

◆CBB61/C61-II 型号常用规格表: (见附表)

CBB61/C61-II型交电容器规格表
Type CBB61/C61-II Capacitor specification sheet

电压 尺寸 容量		电压 Voltage														
		250VAC			300VAC			350VAC			400VAC			450VAC		
外壳 Case	容量 Capacitance	L	H	W	L	H	W	L	H	W	L	H	W	L	H	W
A/B	0.5	32	22	12	32	22	12	32	22	12	32	22	12	32	22	12
C	0.5	34	22	11.5	34	22	11.5	34	22	11.5	34	22	11.5	34	22	11.5
A/B	0.8	32	22	12	32	22	12	32	22	12	32	22	12	32	22	12
C	0.8	34	22	11.5	34	22	11.5	34	22	11.5	34	22	11.5	34	22	11.5
A/B	1	32	22	12	32	22	12	32	22	12	32	22	12	38	23	12
C	1	34	22	11.5	34	22	11.5	34	22	11.5	34	22	11.5	37	22	12
A/B	1.2	32	22	12	32	22	12	32	22	12	32	22	12	38	23	12
C	1.2	34	22	11.5	34	22	11.5	34	22	11.5	34	22	11.5	37	22	12
A/B	1.5	32	22	12	32	22	12	38	23	12	38	23	12	37	24	13.5
C	1.5	34	22	11.5	34	22	11.5	37	22	12	37	22	12	37	24	13.5
A	1.8	32	22	12	32	22	12	38	23	12	38	23	12	38	27	14.5
B	1.8	32	22.5	12	32	22.5	12	37	24	13.5	37	24	13.5	38	27	14.5
C	1.8	34	22	11.5	33.5	22	11.5	37	24	13.5	37	24	13.5	36	25	16
A/B	2	32	22	12	32	22	12	37	24	13.5	37	24	13.5	38	27	14.5
C	2	34	22	11.5	33.5	22	11.5	37	24	13.5	37	24	13.5	36	25	16
A/B	2.5	32	22	12	38	23	12	38	27	14.5	38	27	14.5	38	28	17
C	2.5	34	22	11.5	37	22	12	36	25	16	36	25	16	38	28	17
A/B	3	32	22	12	37	24	13.5	38	28	17	38	28	17	38	29	18.5
C	3	34	22	11.5	37	24	13.5	38	28	17	38	28	17	38	30	17.5
A	4	38	23	12	38	27	14.5	38	29	18.5	38	29	18.5	47	33	19
B	4	37	22	12	38	27	14.5	38	29	18.5	38	29	18.5	47	31	19
C	4	37	24	13.5	36	25	16	38	30	17.5	38	30	17.5	50	30	19.5
A	5	37	24	13.5	38	28	17	48	28	17	48	28	17	47	33	19
B	5	37	24	13.5	38	28	17	48	28	17	48	28	17	47	33	20
C	5	37	24	13.5	38	28	17	50	30	19.5	50	30	19.5	47	33	20
A	6	38	27	14.5	38	29	18.5	47	33	19	47	33	19	47	32	23
B	6	38	27	14.5	38	29	18.5	47	31	19	47	31	19	47	35	20.5
C	6	36	25	16	38	30	17.5	50	30	19.5	50	30	19.5	47	32	23
A	8	38	28	17	47	33	19	47	32	23	47	32	23	58	34	22
B	8	38	28	17	47	31	19	47	35	20.5	47	35	20.5	58	34	22
C	8	38	28	17	50	30	19.5	47	32	23	47	32	23	58	36	23
A	10	48	28	17	47	32	23	50	37	24	50	37	24	58	38	26
B	10	48	28	17	47	33	20	58	34	22	58	34	22	58	38	26
C	10	41	31	19.5	47	33	20	58	34	22	58	34	22	58	38	26
A	12.5	47	33	19	50	34	23	58	38	26	58	38	26	58	41	29
B	12.5	47	31	19	47	35	23	58	38	26	58	38	26	59	42	30
C	12.5	50	30	19.5	47	35	23	58	38	26	58	38	26	59	42	30
A	15	47	33	19	50	37	24	58	38	26	58	38	26	58	43	32
B	15	47	33	20	58	34	22	58	38	26	58	38	26	58	43	32
C	15	47	32	23	58	34	22	59	42	30	59	42	30	58	43	32
A	18	47	32	23	58	38	26	58	41	19	58	41	19	/	/	/
B	18	47	35	20.5	58	36	23	59	42	30	59	42	30	/	/	/
C	18	47	32	23	58	38	26	59	42	30	59	42	30	/	/	/
A	20	58	34	22	58	38	26	58	43	32	58	43	32	/	/	/
B	20	47	35	23	58	38	26	58	43	32	58	43	32	/	/	/
A/B/C	22.5	58	34	22	59	42	30	/	/	/	/	/	/	/	/	/
A/B/C	25	58	36	23	59	42	30	/	/	/	/	/	/	/	/	/
A/B/C	30	58	38	26	58	43	32	/	/	/	/	/	/	/	/	/
A/B/C	35	58	41	29	/	/	/	/	/	/	/	/	/	/	/	/
A/B/C	40	59	42	30	/	/	/	/	/	/	/	/	/	/	/	/

◆特殊要求可根据用户要求协商制作。Special requirement can be fulfilled at the request of customers.