

CBB20型电容器系列

Type CBB20 Series of capacitor A.C


CBB20型电容器系列

Type CBB20 Series of capacitor A.C

- ◆ **执行标准**：满足《UL810-2008》标准。
- ◆ **产品特点**：无感应结构，自愈性能优异，高耐温特性，高容量且尺寸紧凑等特点。
- ◆ **产品用途**：耦合、离合、旁路及定时回路；自动控制系统及讯设备；
充放电、照明、噪音抑制及频率调制。

◆ **主要技术参数**：

额定电压：110V.AC-600V.AC	稳态过电压：允许1.1Un下长期运行
容量偏差：±3%、±5%、±10%	稳态过电流：允许1.3In下长期运行
损耗角正切值：tg δ ≤ 0.0025(100Hz)	优选气候类别：40/70/21 40/85/21 40/105/21
极间耐压：1.5Un/5s	安全等级：P0
极壳耐压：2000V.AC or 2Un+1000VAC	
产品认证：UL、CUL	

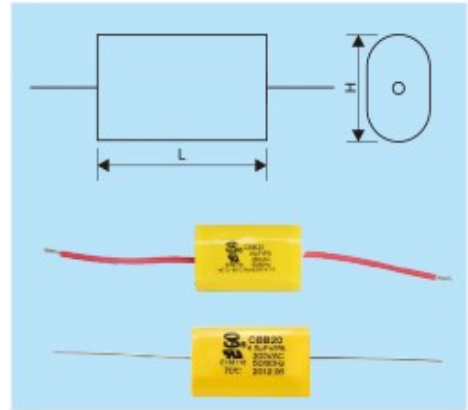

Reference Standard: Meet the requirements of standard (UL810-2008)

Product Characteristic: Non-inductive construction, good self-healing performance, high property of moisture resistance, high capacitance value available and compact size..

Application: coupling, decoupling by passing and timing circuit, automatic control system, communication equipment, charging/discharging lighting, noise suppression and frequency modulation.

Technical Specification:

Rated Voltage: 110V.AC-600V.AC	Steady state overvoltage: Permit long term of operation under 1.1Un
Capacitance Tolerance: ±3%、±5%、±10%	Steady state overcurrent: Permit long term of operation under 1.3In
Dissipation factor: tg δ ≤ 0.0025(100Hz)	Climate Category: 40/70/21 40/85/21 40/105/21
Voltage Proof (Vt-t): 1.5Un/5s	Safety Class: P0
Voltage Proof(Vt-c): 2000V.AC or 2Un+1000VAC	
Product Certificates: UL、CUL	

◆ CBB20型号常用规格表：（见附表）

CBB20型电容器规格表
Type CBB20 Capacitor specification sheet

容量 Capacity	电压 Voltage																				
	250VAC			300VAC			350VAC			400VAC			450VAC			500VAC			600VAC		
	L	H	W	L	H	W	L	H	W	L	H	W	L	H	W	L	H	W	L	H	W
0.5	32	13.5	7	32	15	7	32	11	7	32	11	7	32	15	7	37	16	8	37	17.5	10
0.8	32	12	7	32	15.5	8	32	14.5	8.5	32	14.5	8.5	32	17	9	37	19.5	11	37	21.5	12
1	32	13.5	7	32	15	7.5	32	16.8	9	32	16.8	9	37	17	9	37	20.5	11.5	37	23	14
1.2	32	12	7	32	16	8	37	16.5	8.5	37	16.5	8.5	37	18	10	37	22	12.5	37	24.8	15.5
1.5	32	14	7	37	16	8	37	18.5	9.5	37	18.5	9.5	37	19.5	11.5	37	23.7	14	47	23.5	14
1.8	32	14	8	37	17	9	37	19.5	10.5	37	19.5	10.5	37	20.8	13	37	25	15.8	47	25	15.5
2	32	15	8.5	37	17.5	9.5	37	20.5	11	37	20.5	11	37	21.6	13.5	37	26	16.8	47	26	16.5
2.5	32	17	9	37	19.5	10	37	21	12.5	37	21	12.5	37	23.5	15.5	47	25.6	14.6	47	28	18.8
3	37	17	9	37	20.5	11	37	23	13.8	37	23	13.8	47	23	13.5	47	27	16	47	30	20.8
4	37	18.5	10.5	47	20.5	11	47	22.8	13.5	47	22.8	13.5	47	25.5	16	47	31	18.5	47	34.5	23.5
5	47	18	10	47	21.8	12.5	47	24.7	15	47	24.7	15	47	27.6	18	47	33.7	21	60	34	23
6	47	20	10.5	47	23	13.8	47	26.5	17	47	26.5	17	47	27.5	20	47	37.8	22	60	36.5	25.5
8	47	22	12.5	47	25.5	16	60	26.5	17	60	26.5	17	60	30	20.5	47	42	26	60	41	30
10	60	21.5	12	60	25.5	16	60	29	19.5	60	29	19.5	60	32.7	23	60	41	25.5	60	45	34
12.5	60	23.5	14	60	27.5	18	60	31.5	22	60	31.5	22	60	35.8	26.5	60	44.7	29	60	51.7	35
15	60	25	15.5	60	29.5	20	60	34	24.6	60	34	24.6	60	38.5	29	60	48	32.5	/	/	/
18	60	26.5	17	60	31.5	22	60	36.6	27	60	36.6	27	60	41.7	32	60	51.7	35	/	/	/
20	60	27.5	18	60	32	23.5	60	38	29	60	38	29	60	43.6	34	/	/	/	/	/	/
22.5	60	28.8	19.5	60	34.5	25	60	40	30.5	60	40	30.5	60	47.5	34.9	/	/	/	/	/	/
25	60	30	20.8	60	36	26.7	60	42	32.5	60	42	32.5	60	51	34.9	/	/	/	/	/	/
30	60	33.5	22.5	60	39	29.5	60	47	34.5	60	47	34.5	/	/	/	/	/	/	/	/	/
33	60	34.5	23.5	60	40.5	31	60	50	34.5	60	50	34.5	/	/	/	/	/	/	/	/	/
35	60	33.5	22.5	60	41.5	32	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/
40	60	33.5	22.5	60	44	34.5	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/

◆ 特殊要求可根据用户要求协商制作。Special requirement can be fulfilled at the request of customers.